

Technical Data Field Bus Module PBM100

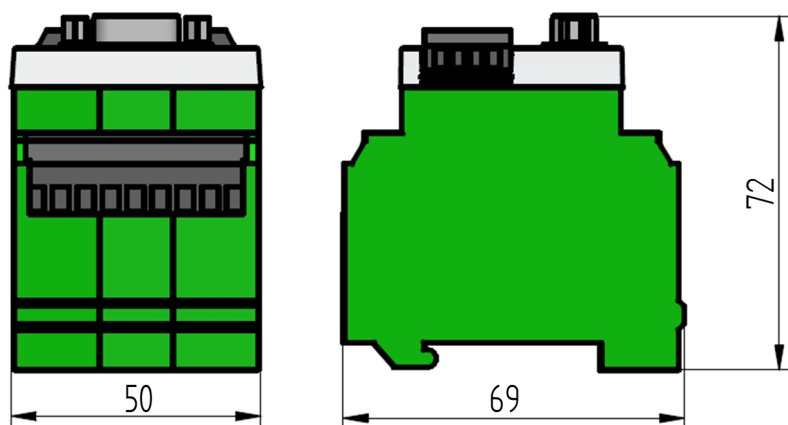


Fig. 1 Dimensions PBM100

PBM100	
Power supply	24 VDC +10/-15% via bus terminals
Current consumption	100 mA
Housing	PA6.6 UL94-V0 Cover: Polycarbonate, transparent
Installation	Support rail TH35 according to EN 60715
Dimensions (HxWxD)	69 x 50 x 72 mm 2.72 x 1.97 x 2.83" in
Weight	105 g 0.23 lb
Flammability	UL-94 V0 (panel: UL-94 V2)
Lengths of cable	Supply 24 VDC <10 m 32.81 ft LSB: max. 100 m 328.08 ft (screened) PROFIBUS DP: 100 m 328.08 ft (screened)

Environmental conditions

Operation	Climatic condition	class 3K5 as per DIN EN 60721-3
	Mechanical condition	class 3M5 as per DIN EN 60721-3
	Temperature range	-20 ... +60 °C -4 °F ... +140 °F (condensation not permitted)
Transport	Climatic condition	class 2K3 as per DIN EN 60721-3
	Mechanical condition	class 2M2 as per DIN EN 60721-3
	Temperature range	-20 ... +70 °C -4 °F ... +158 °F (condensation not permitted)
Storage	Climatic condition	Class 1K3 as per DIN EN 60721-3
	Mechanical condition	Class 1M2 as per DIN EN 60721-3
	Temperature range	-20 ... +70 °C -4 °F ... +158 °F (condensation not permitted)
Protection class	according to DIN EN60529	IP40 (housing) IP20 terminals

NOTICE

The limits of the technical data must be strictly adhered to.

Technical Data Field Bus Module PBM100

Order Information

Description / Type	Order no.
Field bus module PBM100, PROFIBUS DP	667R0700-1

Approvals



The information in this publication is subject to technical changes.



**LAMTEC Meß- und Regeltechnik
für Feuerungen GmbH & Co. KG**

Josef-Reiert-Straße 26

D-69190 Walldorf

Telefon: +49 (0) 6227 6052-0

Telefax: +49 (0) 6227 6052-57

info@lamtec.de
www.lamtec.de

